Maximize LEED Points with Camino's...

MR Series Access Floor System - Strawboard

Camino's strawboard access floor panel is a premium composite panel engineered with straw fibers and no added urea formaldehyde.

MR SERIES GENERAL OFFICE PANEL:

The combination of strawboard core strength and steel outer sheets provide superior acoustics.

The surface preparation is typically bare. Cornerlock design in conjunction with the high density strawboard core provides slab like underfoot performance.




LEED CREDIT	MEETS CREDIT
MR Credit 4.1 Recycled Content	YES
MR Credit 4.2 Recycled Content	YES
MR Credit 6.0 Rapidly Renewable Materials	YES
EQ Credit 4.1 Low-emitting Materials: Sealants and Adhesives	YES
EQ Credit 4.4 Low-emitting Materials: Composite Wood	YES

CAMINO

MODULAR SYSTEMS INC

Maximize LEED Points with Camino's...

MR Series Access Floor System - Strawboard

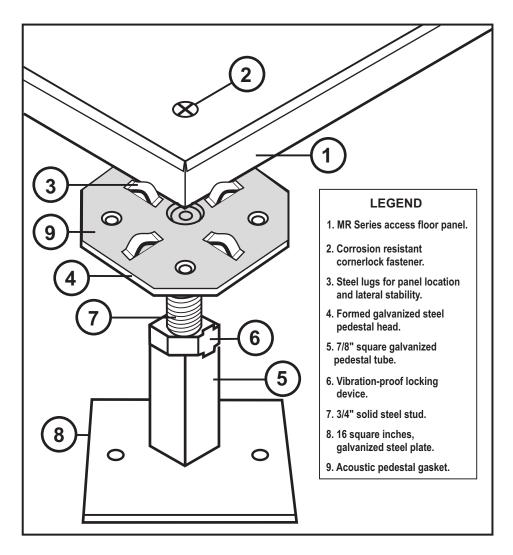

PANEL TYPE	MR 1000	MR 1250
Concentrated Load*	1000 lbs. (4.4 kN)	1250 lbs. (5.6 kN)
Uniform Load**	250 lbs. (114 kg.)	300 lbs. (136 kg.)
Rolling Load***	1000 lbs./600 lbs. (455 kg./272 kg.)	1250 lbs./800 lbs. (568 kg./362 kg.)
Minimum Ultimate Load*	2300 lbs. (1043 kg.)	2600 lbs. (1179 kg.)
Size	24" x 24" (610mm x 610mm)	24" x 24" (610mm x 610mm)
Finished Floor Heights	2-1/2" to 60" (75mm to 1500mm)	2 1/2" to 24" (75mm to 600mm)
Understructure	Bolted Stringer or Cornerlock	Bolted Stringer or Cornerlock
Floor Finishes	High Pressure Laminate, Carpet Tile	High Pressure Laminate, Carpet Tile,
	Conductive Vinyl, and Stone.	Conductive Vinyl, and Stone.

^{*}Measured on 1 sq. in. (25mm²) Max. deflection of 0.100 in. (2.5mm.)

www.camino-access-floors.com

^{**}Measured on 1 sq. ft. (30 cm² area.)

^{***3&}quot; diameter (76mm) x 1-13/16" wide (46mm) wheel / 6" diameter (152mm)x 1-1/2" (38mm) wide wheel.